


Unix: need to know

Chris Shaffer Aug 2009

Consed needs four folders

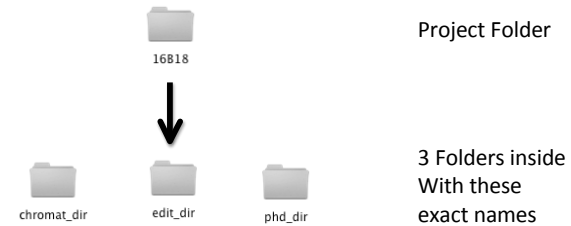

Using command line

- When starting consed you will need to do two things in this order
 1. Use the “cd” command listing every folder separated by “/” on how to get to the proper edit_dir
 2. Type the “consed” command

Example



You always start at home
My home is called “chris”

If the project is in my home folder I type:
“cd 16B18/edit_dir after the prompt so
It looks like this:

```
>cd 16B18/edit_dir
```

If the project were on my desktop I
would type:

```
>cd Desktop/16B18/edit_dir
```